



**avenger top**  
www.avengertop.com

**FORD**  
RANGER MK.3

The Finest Lifestyle Truck Tops

## GB Fitting Instructions.

- (GB) Fitting Instructions
- (D) Montageanleitung
- (NL) Montagevoorschrift
- (F) Instructions de montage
- (E) Instrucciones de montaje
- (I) Schema di montaggio
- (S) Manual

## Fitting Instructions for Ford Ranger MK.3

XTC Commercial Ladder Rack Compatible  
XTC Ladder Rack Compatible  
WorkStyle Ladder Rack Compatible



45 min

All right reserved to modify the text  
www.avengertop.com



ISSUE.1

January 17, 2008

Weight : 80 kg



**avenger top**  
www.avengertop.com

**FORD**  
RANGER MK.3

### Required tools



13 mm



∅ 4 mm  
∅ 8 mm



Nm



1) With both the vehicle's tailgate and Truck Top's tailgate closed using 4 people lift the Truck Top on to the bed. Line up, lifting the top far forward so the Truck Top's glassed rear door touches the vehicle's tailgate.

Check position around rear seal front & sides.

2) Open both tailgates & climb inside, clamp down firmly (without over tightening) in position on all six points. Check again the Alignment on the outside & check the tailgates close without fouling the rear door retaining catches may need adjusting on the inner pillars (two bolts) so as the door catches securely at both side.

**Do not over tighten.**

3) Fit the 6 oval shaped rubber grommets to cover the fittings.

4) **Fitting of the rear door corner seal** - the two shape corner rubbers are essential in ensuring the Truck Top is reasonably waterproof. Clean off the paintwork with metholated wipe or similar & adhere as illustrated. These must be adhered correctly.

5) **Wiring** – We recommend using a qualified auto-electrician:

Drill a small (approx: 8mm) hole in the driver side Rear light cluster housing.

Pass the three wires through the hole & joint to the vehicle's wiring.

**Yellow** is - Interior Light

**Black** is – Earth

**Red** is – Spoiler brake light.

Use care and **cut** the cable tie which holds the wires.

Do not pull as this will rip the head lining.

6) Check tightness of the clamps periodically.

All right reserved to modify the text  
www.avengertop.com



**avenger top**  
www.avengertop.com

**FORD**  
RANGER MK.3

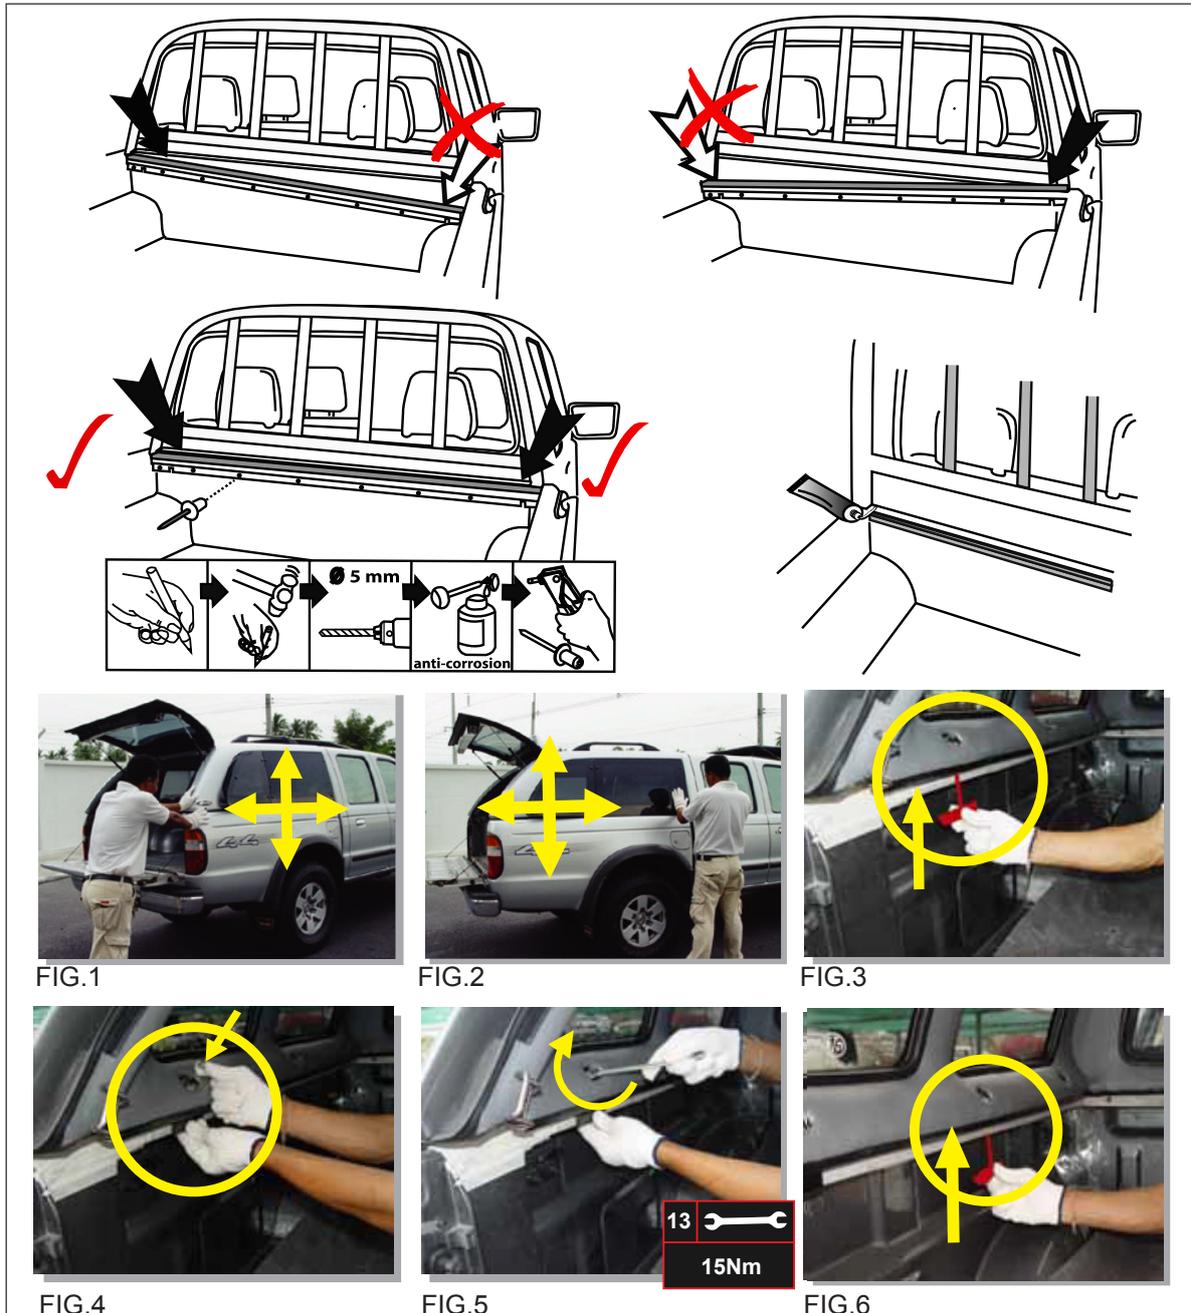


FIG.1

FIG.2

FIG.3

FIG.4

FIG.5

FIG.6

All right reserved to modify the text  
www.avengertop.com



FIG.7



FIG.8



FIG.9



FIG.10



FIG.11



FIG.12



FIG.13



FIG.14



FIG.15

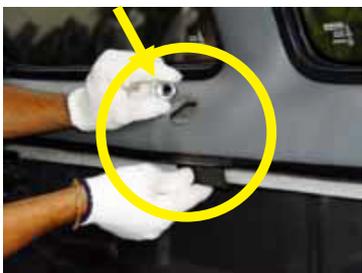


FIG.16



FIG.17

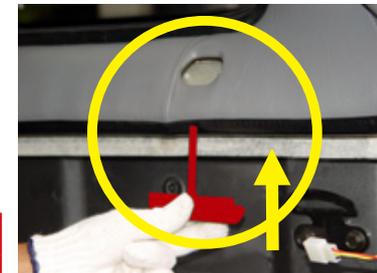


FIG.18

All right reserved to modify the text  
www.avengertop.com



**avenger top**  
www.avengertop.com

**FORD**  
RANGER MK.3



FIG.19



FIG.20



FIG.21



FIG.22



FIG.23



FIG.24



All right reserved to modify the text  
www.avengertop.com